
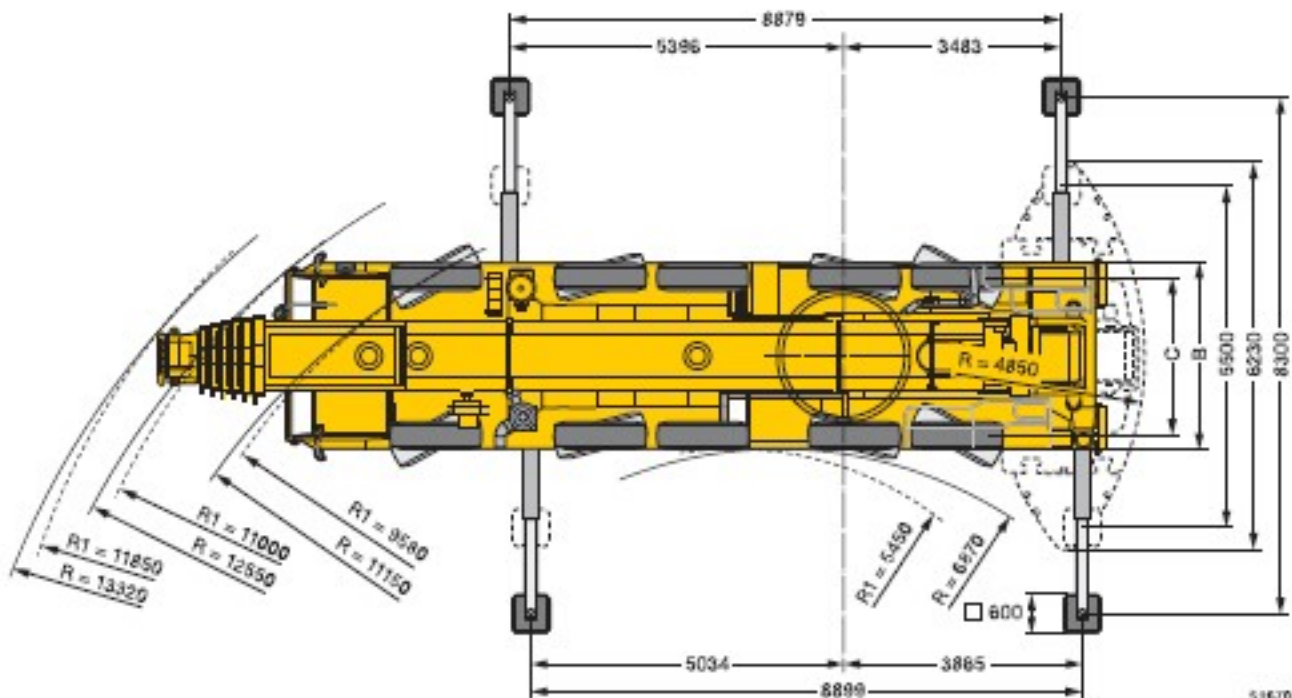


GRUE 200 T. 1/2

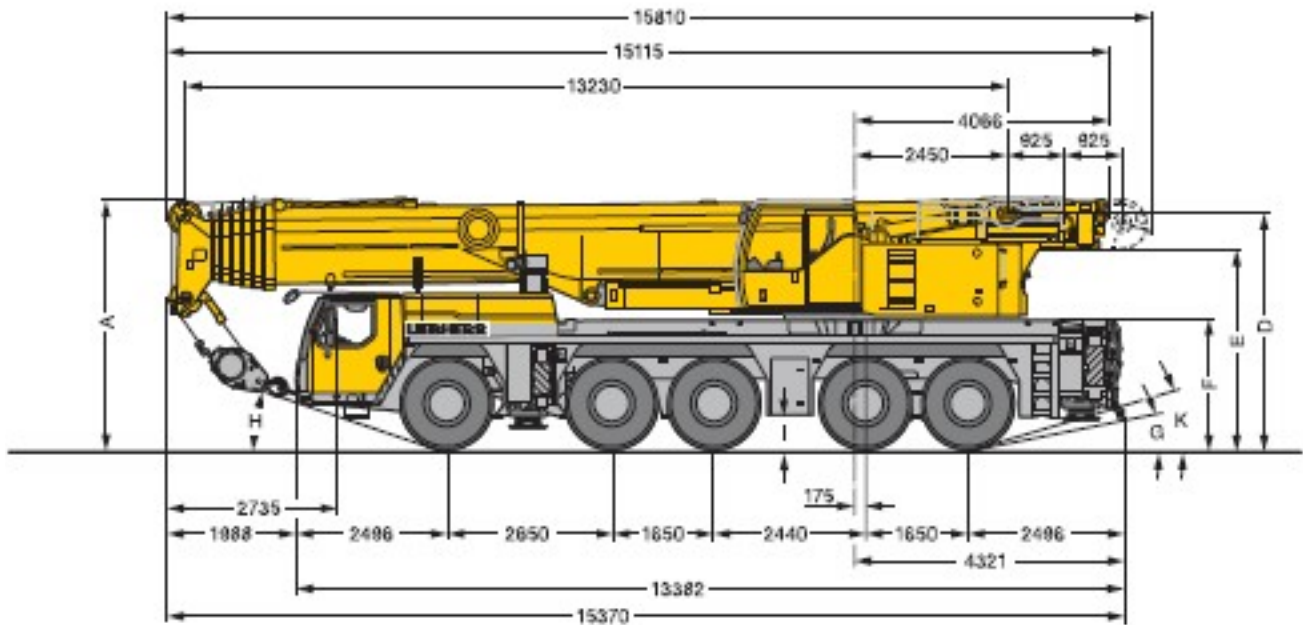

R. = /Rad/steering - /Wheel steering - Dirección toutes roues - Tutti gli assi sterzanti - Dirección en todos los ejes - Поворот всеми колесами

⊙	Maße - Dimensions - Encombrement - Dimensioni - Dimensiones - Размеры mm											
	A	A	B	C	D	E	F	G	H	I	K	
		150 mm*										
385/95 R 25 (14,00 R 25)	3950	3800	3000	2563	3704	3139	2000	10"	15"	377	15"	
445/95 R 25 (16,00 R 25)	4000	3850	3000	2551	3754	3189	2050	11"	17"	427	16"	
525/80 R 25 (20,5 R 25)	4000	3850	3100	2573	3754	3189	2050	11"	17"	427	16"	

* abgelenkt / lowered - abajado / abbassato / suspensión abajo / опущено

GRUE 200 T. 2/2

Höhhöhen
Lifting heights
 Hauteurs de levage • Altezza di sollevamento
 Alturas de elevación • Высота подъема

LICCON2

